

I thought i would give myself a project last week as i was bored at work and this is what i done.  
first i got some old lights of ebay and drew 2 circles on each light where i wanted my lights to sit.



then i cut out the holes using a hole saw 102mm wide





then i gutted out the back of the light with my dremel but i left the mounting screws so i can attach them back to the car.



here is the tub i used to make the pockets for the led lights





i put the tubs in making sure i had the right angles on both lights then glue them in with super glue










then i fibre glassed them in from the back only.

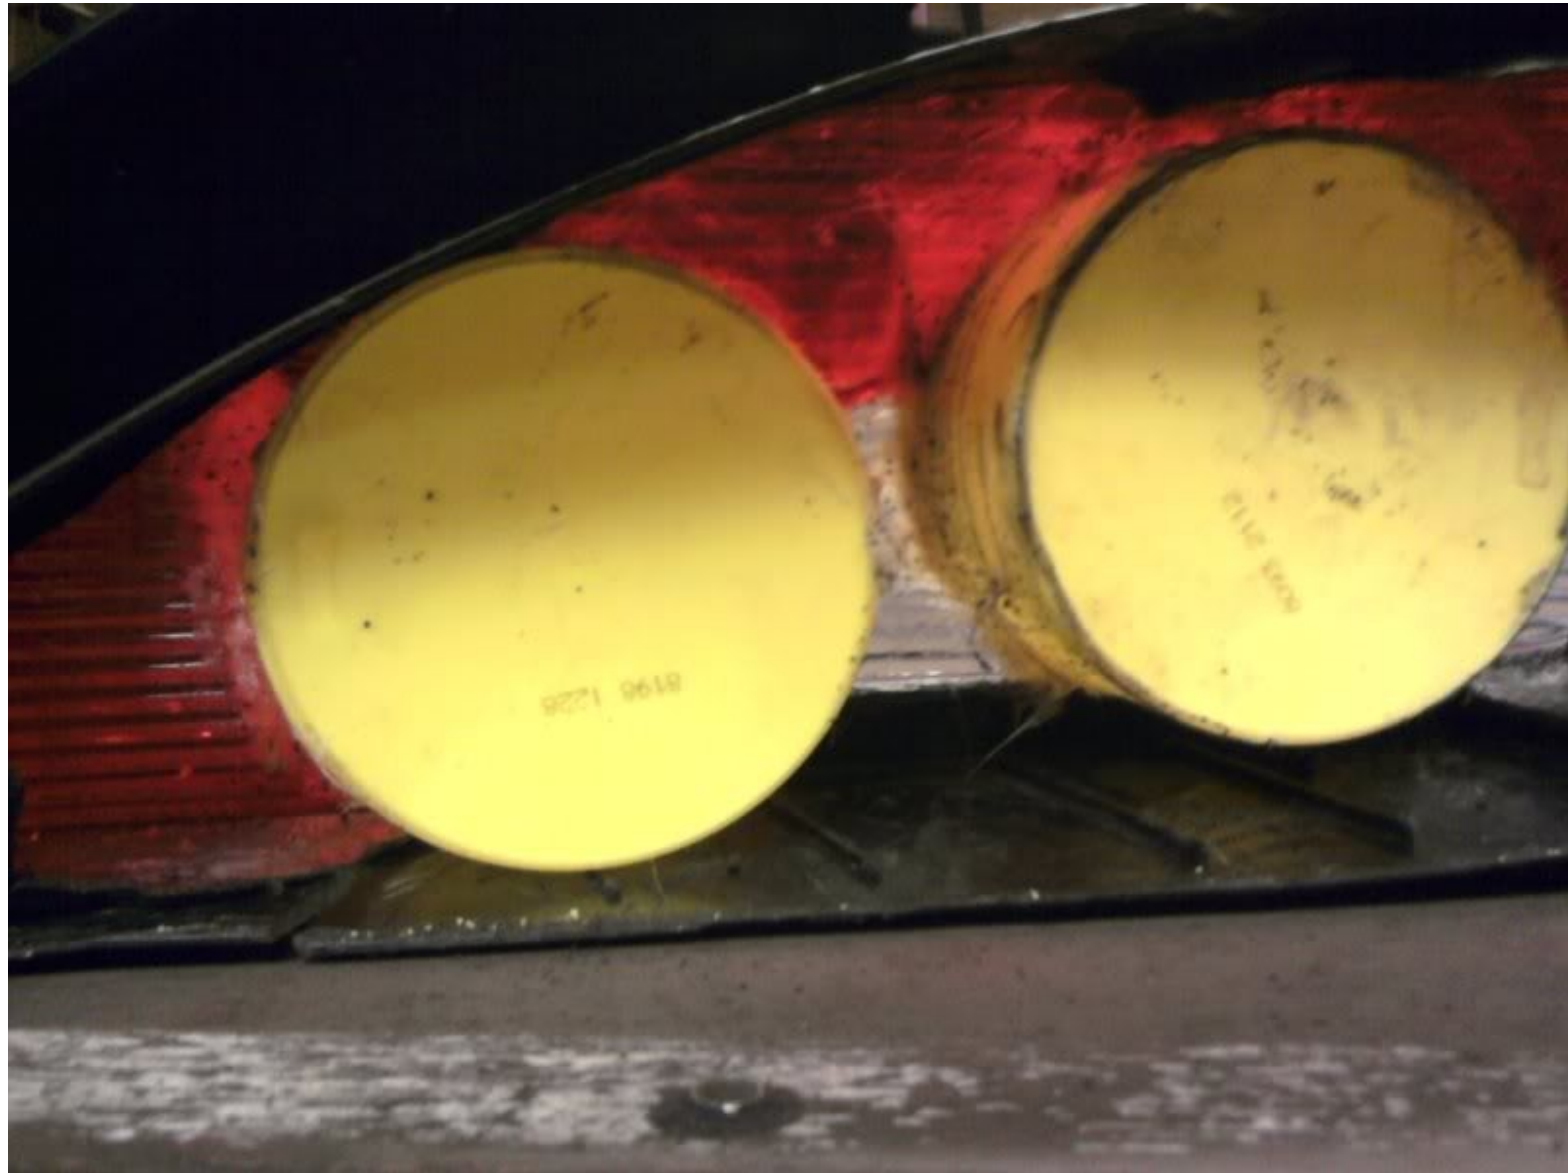

i cut the tubs down with a hacksaw blade.






i then rubbed the lights down with 220 grit sand paper so that the filler would stick to the lights.




here it is with the filler before rubbing down.



and after rubbing down.

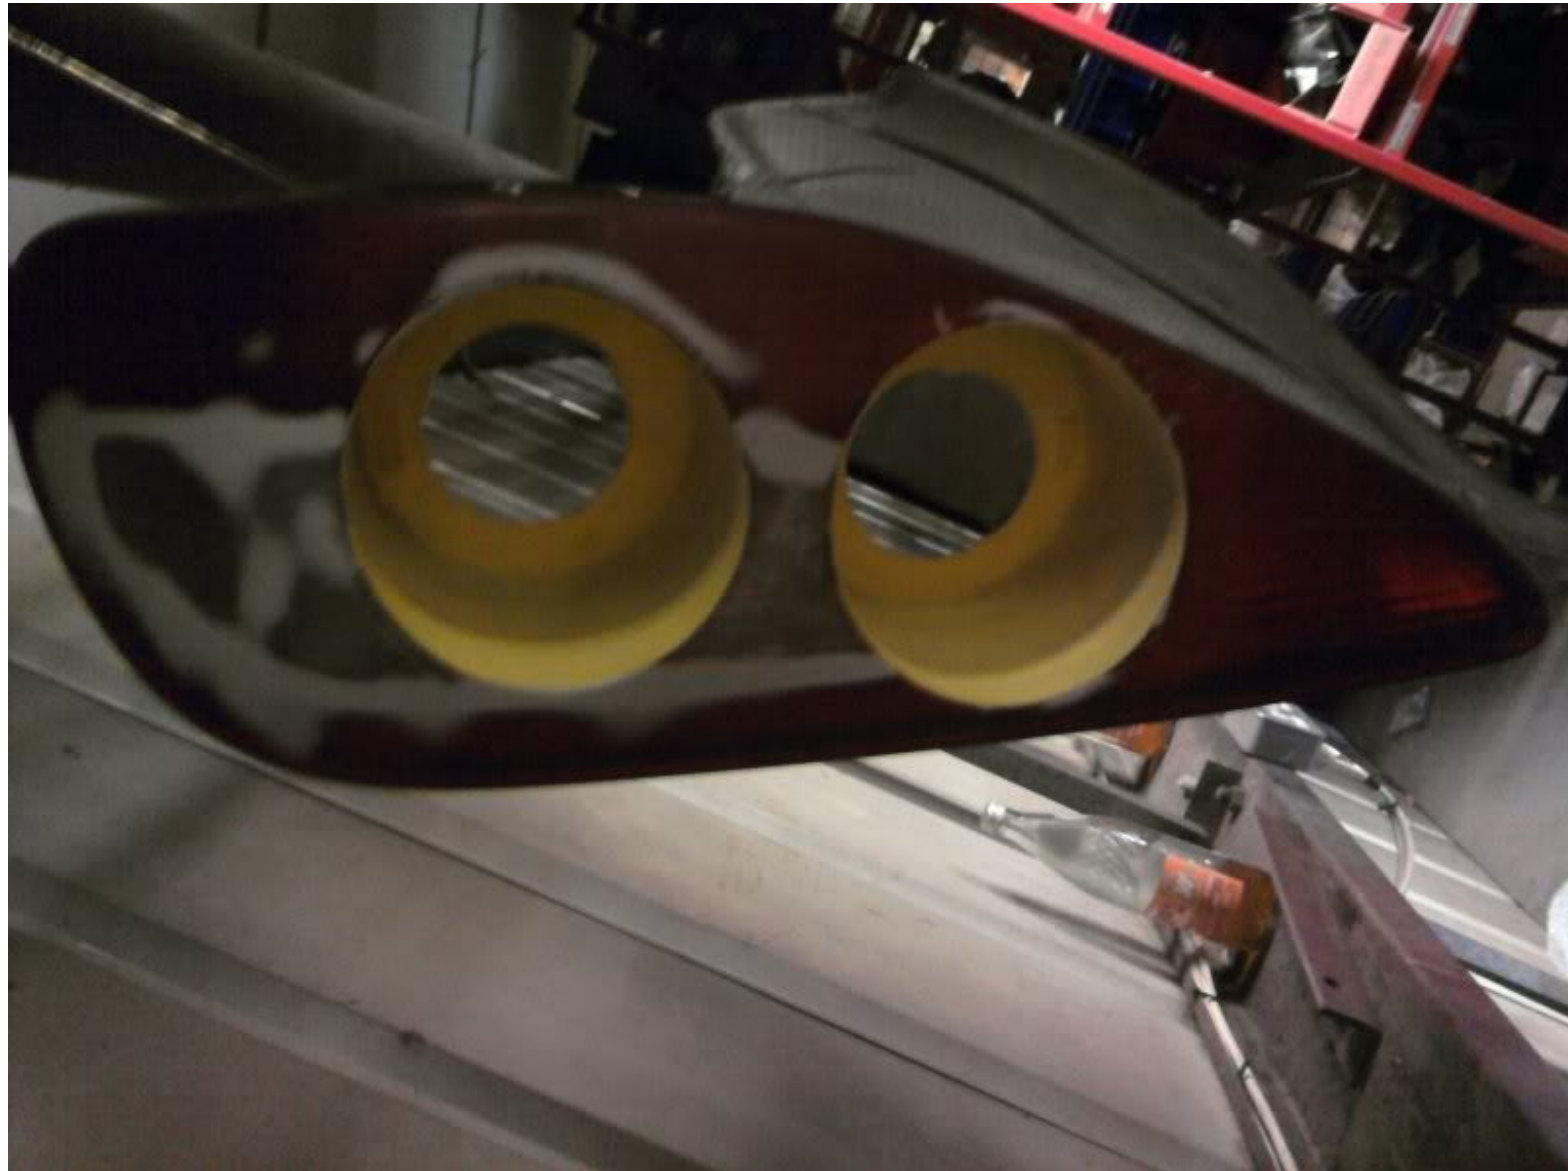

i then cut centre holes out for the middle lights with a hole saw 60mm then i primered them and rubbed down with 500 grit then 1200 grit to get smooth for painting

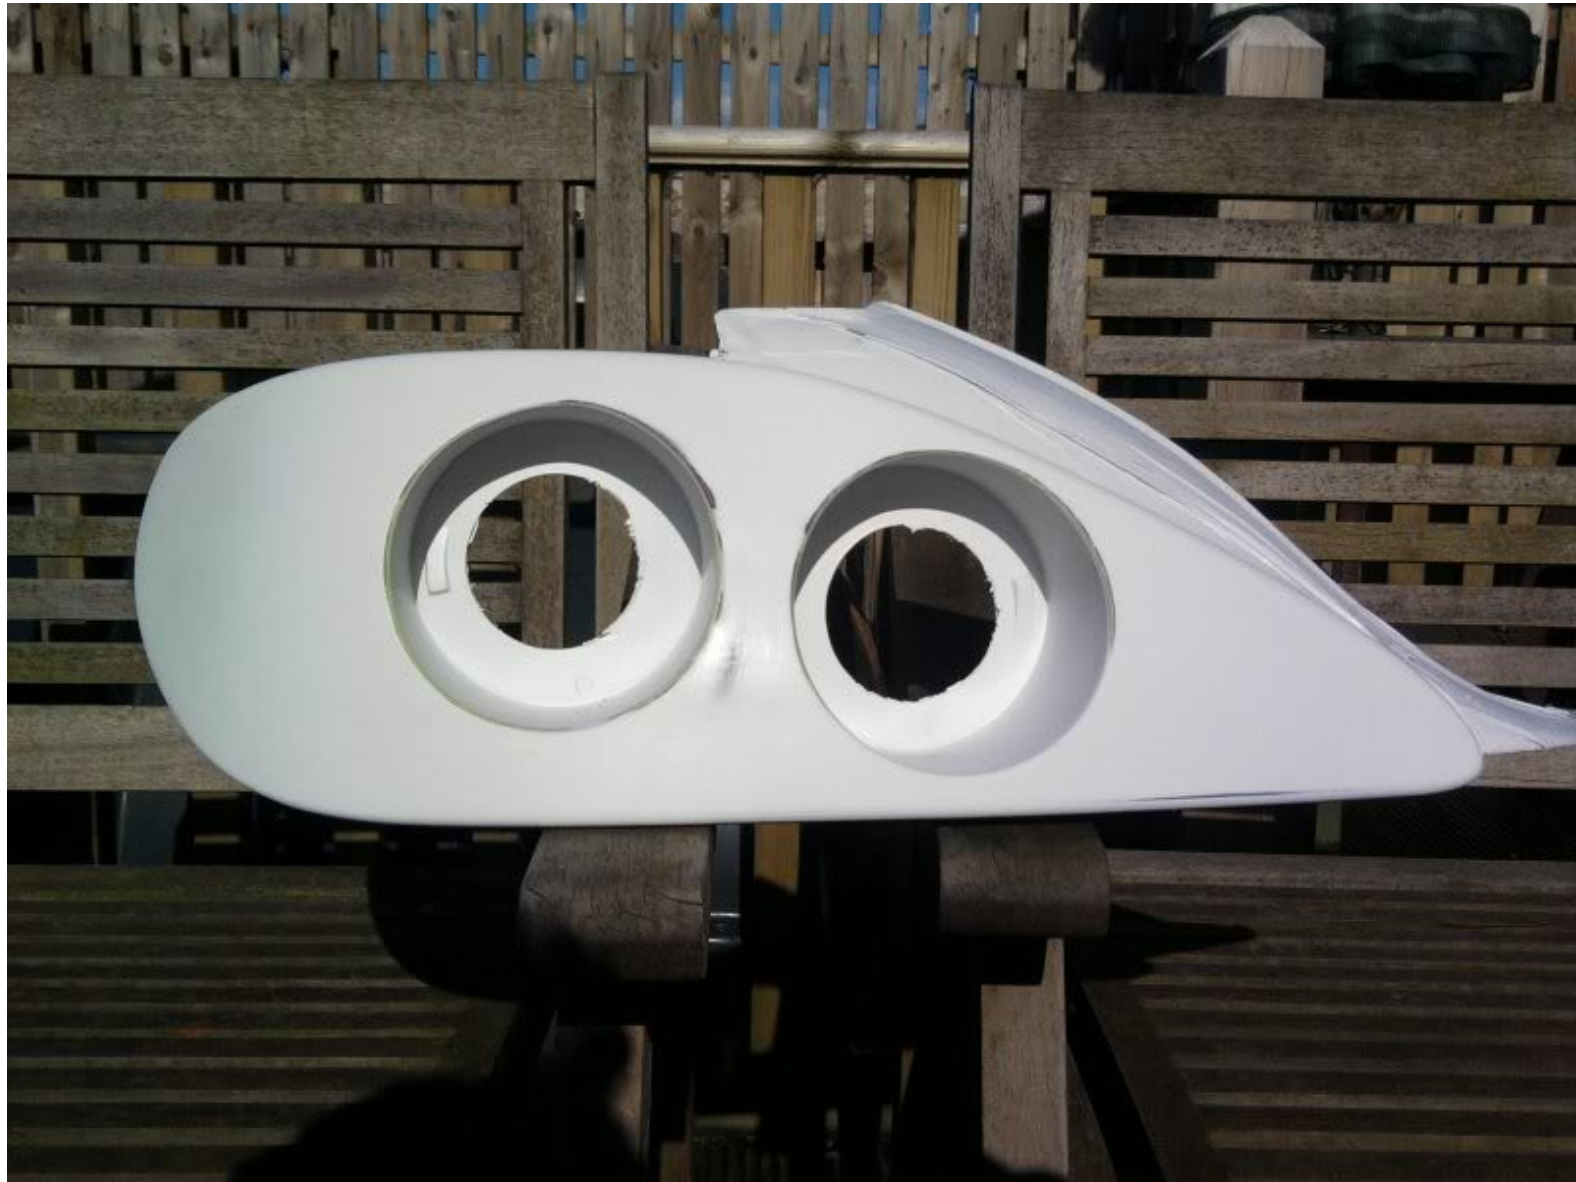

i then painted them just with a spray can i got from peugeot for £8 and that came with laquer aswell





here i fitted my lights that i bought from quad conversions







and this is them on the car and working fine.







